

승 인	
정식승인	()
한도승인	()

SPECIFICATIONS

CUSTOMER	
ITEM	LINE FILTER
MODEL NAME	
PART No	Φ10*2mH(TUBE / V-TYPE)
DATE	2010-11-19

검 토	심 사	승 인
승인유효기간	승인일로부터	년

신청회사명	 남선전자주식회사	TEL	02-2689-9418
		FAX	02-2689-8628
주 소	Na-3506, Chungang Circulation Complex, 1258 Kurobon-ong, Kuro-Ku, Seoul, Korea, 152-721		

개정이력 LIST

REV NO.	개정일자	개정항목	개정내용	관련근거
0	2010.11.19		초도발행	
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				


APPROVAL SHEET

DATE	2010. 11. 19
PAGE	3 / 5


CUSTOMER			
PART NAME	LINE FILTER	MODEL NO.	2mH
PART NO.	Φ10*2mH(TUBE / V-TYPE)	SIZE NO.	10x6x4

1. DIMENSION (UNIT:mm)

< FRONT VIEW >

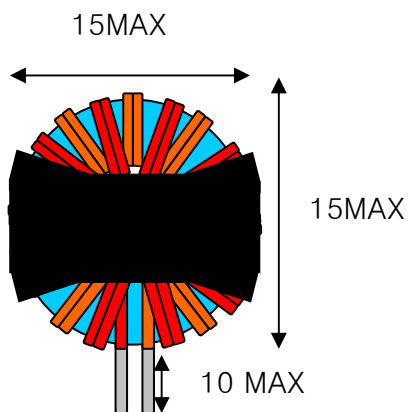

< SIDE VIEW >

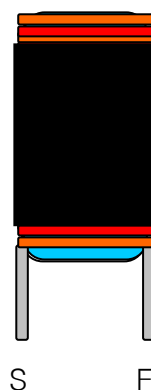

NAMSUN ELECTRONICS CO., LTD.

Na-3506, Chungang Circulation Complex, 1258
 Kurobon-dong, Kuro-Ku, Seoul, Korea, 152-721
 TEL:02-2689-9418 , FAX:02-2689-8628

DESIGN	CHECK	APPROVAL
개발실 임경민 10.11.19	개발실 김상문 10.11.19	개발실 조한석 10.11.19
FILE NO.	SH10-149	

APPROVAL SHEET	DATE	2010. 11. 19
	PAGE	4 / 5

CUSTOMER			
PART NAME	LINE FILTER	MODEL NO.	2mH
PART NO.	Φ10*2mH(TUBE / V-TYPE)	SIZE NO.	10x6x4

2. SCHEMATIC DIAGRAM			
	WINDNG	BOTTOM VIEW	C.C.W
	N.C PIN		
	REMOVE PIN		

3. WINDING SPEC

WINDING ORDER	TERMINAC NO	WIRE	TURNS
W1	S - F	2UEW 0.35Φ(R.N)X2P	35Ts

4. ELECTRICAL CHARACTERISTIC


NO	CLOSURE	TERMINAL NO.	ELECTRICAL CHARACTERISTICS	TOLERANCE	CONDITION
1	INDUCTANCE	S - F	2mH	MIN	PM - 6306 AGILENT4263B at <u>1.0</u> KHz. LEVEL : <u>1.0</u> V
2	DC CURRENT OVERLAP	DC <u>0.5</u> m A, (START TO FINISH)			
3	INSULATION RESISTANCE	DC 500V, 100MΩ MIN (COIL TO CORE)			

<p style="font-size: 12px; margin: 5px 0;">Na-3506, Chungang Circulation Complex, 1258 Kurobon-dong, Kuro-Ku, Seoul, Korea, 152-721 TEL: 02-2689-9418 , FAX: 02-2689-8628</p>	DESIGN	CHECK	APPROVAL
	FILE NO.	SH10-149	

APPROVAL SHEET	DATE	2010. 11. 19
	PAGE	5 / 5

CUSTOMER			
PART NAME	LINE FILTER	MODEL NO.	2mH
PART NO.	φ10*2mH(TUBE / V-TYPE)	SIZE NO.	10x6x4

5. INTERNAL STRUCTURE



6. MATERIAL LIST

NO	COMPONENT	NAME OF MATERIAL	MANUFACTURER OF MATERIAL	REMARKS
1	CORE	EH-8(10x6x4)	ELICO CO.,LTD.	D:\업무용 상형전자(L값맞기)
2	WIRE	POLYURETHANE 2UEW 0.35φ	TAIHAN ELECTRIC WIRE CO., LTD. CNI CABLE CO.,LTD.	C:\WDocuments and Settings\WAd
3	FLUX	LF - 715K	TAEWON CHEMICAL CO.,LTD	C:\WDocuments and Settings\WAd
4	TUBE	HEAT SHRINK TUBE	LS CABLE CO.,LTD. HAN KYUNG COMPONENT	D:\업무용 상형전자(L값맞기)
5	SOLDER	SN99.5%,CU0.5%	DONGBU HANNONG CHEMICAL CO.,LTD.	C:\WDocuments and Settings\WAd

NAMSUN ELECTRONICS CO., LTD.

Na-3506, Chungang Circulation Complex, 1258
Kurobon-dong, Kuro-Ku, Seoul, Korea, 152-721
TEL:02-2689-9418 , FAX:02-2689-8628

DESIGN	CHECK	APPROVAL
 임경민 10.11.19	 김상문 10.11.19	 조한석 10.11.19
FILE NO.	SH10-149	