

승 인	
정식승인	()
한도승인	()

SPECIFICATIONS

CUSTOMER	
ITEM	LINE FILTER
MODEL NAME	
PART No	Φ14 *1mH*V-TYPE
DATE	2013-07-15

검 토	심 사	승 인
승인유효기간	승인일로부터 년	

신청회사명	 남선전자주식회사	TEL	02-2689-9418
		FAX	02-2689-8628
주 소	Na-3506, Chungang Circulation Complex, 1258 Kurobon-dong, Kuro-Ku, Seoul, Korea, 152-721		

APPROVAL SHEET

DATE

2013-07-15

PAGE

1 / 3

CUSTOMER

PART NAME

LINE FILTER

MODEL NO.

PART NO.


Φ14*1mH*V-TYPE

SIZE NO.


T1407

1. DIMENSION (UNIT:mm)


< TOP VIEW >

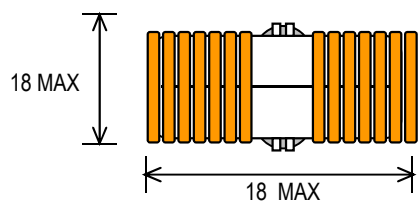

< FRONT VIEW >

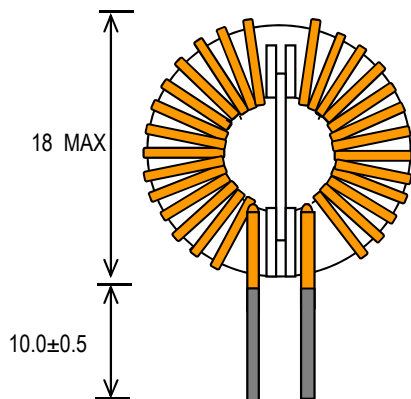


< SIDE VIEW >

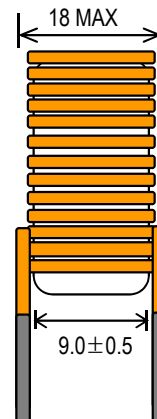

NAMSUN ELECTRONICS CO., LTD.

Na-3506, Chungang Circulation Complex, 1258
Kurobon-dong, Kuro-Ku, Seoul, Korea, 152-721
TEL: 02-2689-9418 , FAX: 02-2689-8628

DESIGN



FILE NO.

CHECK



APPROVAL



SH - 080813 - 36

APPROVAL SHEET			DATE	2013-07-15																								
			PAGE	2 / 3																								
CUSTOMER																												
PART NAME	LINE FILTER	MODEL NO.																										
PART NO.	Φ14*1mH*V-TYPE	SIZE NO.	T1407																									
2. SCHEMATIC DIAGRAM 		WINDNG	BOTTOM VIEW	C.C.W																								
		N.C PIN																										
		REMOVE PIN																										
3. WINDING SPEC																												
<table border="1"> <thead> <tr> <th>WINDING ORDER</th> <th>TERMINAC NO</th> <th>WIRE</th> <th>TURNS</th> </tr> </thead> <tbody> <tr> <td>W1</td> <td>1 → 4</td> <td>UEW 0.6Φ x 1P</td> <td>16 Ts</td> </tr> <tr> <td>W2</td> <td>2 → 3</td> <td>UEW 0.6Φ x 1P</td> <td>16 Ts</td> </tr> </tbody> </table>					WINDING ORDER	TERMINAC NO	WIRE	TURNS	W1	1 → 4	UEW 0.6Φ x 1P	16 Ts	W2	2 → 3	UEW 0.6Φ x 1P	16 Ts												
WINDING ORDER	TERMINAC NO	WIRE	TURNS																									
W1	1 → 4	UEW 0.6Φ x 1P	16 Ts																									
W2	2 → 3	UEW 0.6Φ x 1P	16 Ts																									
4. ELECTRICAL CHARACTERISTIC																												
<table border="1"> <thead> <tr> <th>NO</th> <th>CLOSURE</th> <th>TERMINAL NO.</th> <th>ELECTRICAL CHARACTERISTICS</th> <th>TOLERANCE</th> <th>CONDITION</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>INDUCTANCE</td> <td>1 → 4 2 → 3</td> <td>1.0 mH</td> <td>± 30%</td> <td>PM - 6306 LCR-METER at <u>1.0</u> KHz. LEVEL : <u>1.0V</u></td> </tr> <tr> <td>2</td> <td>DC CURRENT OVERLAP</td> <td colspan="4">DC <u>0.5m</u> A, (START TO FINISH)</td> </tr> <tr> <td>3</td> <td>INSULATION RESISTANCE</td> <td colspan="4">DC 500V, 100MΩ MIN(COIL TO CORE)</td> </tr> </tbody> </table>					NO	CLOSURE	TERMINAL NO.	ELECTRICAL CHARACTERISTICS	TOLERANCE	CONDITION	1	INDUCTANCE	1 → 4 2 → 3	1.0 mH	± 30%	PM - 6306 LCR-METER at <u>1.0</u> KHz. LEVEL : <u>1.0V</u>	2	DC CURRENT OVERLAP	DC <u>0.5m</u> A, (START TO FINISH)				3	INSULATION RESISTANCE	DC 500V, 100MΩ MIN(COIL TO CORE)			
NO	CLOSURE	TERMINAL NO.	ELECTRICAL CHARACTERISTICS	TOLERANCE	CONDITION																							
1	INDUCTANCE	1 → 4 2 → 3	1.0 mH	± 30%	PM - 6306 LCR-METER at <u>1.0</u> KHz. LEVEL : <u>1.0V</u>																							
2	DC CURRENT OVERLAP	DC <u>0.5m</u> A, (START TO FINISH)																										
3	INSULATION RESISTANCE	DC 500V, 100MΩ MIN(COIL TO CORE)																										
			<table border="1"> <thead> <tr> <th>DESIGN</th> <th>CHECK</th> <th>APPROVAL</th> </tr> </thead> <tbody> <tr> <td>개발실 이상순 13-7-15</td> <td>개발실 김상문 13-7-15</td> <td>개발실 노성복 13-7-15</td> </tr> <tr> <td>FILE NO.</td> <td colspan="2">SH - 080813 - 36</td> </tr> </tbody> </table>		DESIGN	CHECK	APPROVAL	개발실 이상순 13-7-15	개발실 김상문 13-7-15	개발실 노성복 13-7-15	FILE NO.	SH - 080813 - 36																
DESIGN	CHECK	APPROVAL																										
개발실 이상순 13-7-15	개발실 김상문 13-7-15	개발실 노성복 13-7-15																										
FILE NO.	SH - 080813 - 36																											
Na-3506, Chungang Circulation Complex, 1258 Kurobon-dong, Kuro-Ku, Seoul, Korea, 152-721 TEL: 02-2689-9418 , FAX: 02-2689-8628																												

APPROVAL SHEET

DATE 2013-07-15

PAGE 3 / 3

CUSTOMER

PART NAME

LINE FILTER

MODEL NO.


PART NO.

Φ14*1mH*V-TYPE

SIZE NO.

T1407

5. INTERNAL STRUCTURE

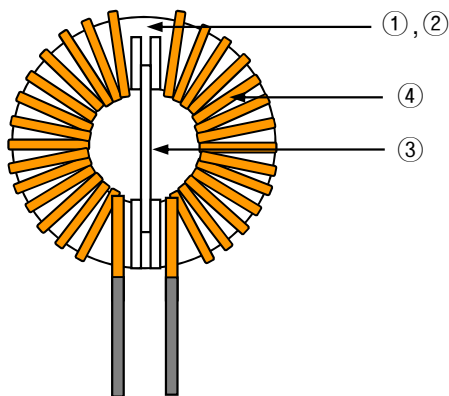

6. MATERIAL LIST

NO	COMPONENT	NAME OF MATERIAL	MANUFACTURER OF MATERIAL	REMARKS
1	CORE	HM5A T1407	ISU CO.,LTD.	
2	CORE COVER	PBT (SK655FR) PBT (GP-1006-F) PBT (VB-5300GF) UL94V-0 CLASS	EI DUPONT DE NEMOURS & CO.,LTD LG CHEMICAL LTD CHEIL INDUSTRIES INC. (한국보빈)	E41938 E67171(M) E115797
3	COIL SEPARATOR	PBT (SK655FR) PBT (GP-2306-F) PBT (VB-5300GF) UL94V-0 CLASS	EI DUPONT DE NEMOURS & CO.,LTD LG CHEMICAL LTD CHEIL INDUSTRIES INC. (한국보빈)	E41938 E67171(M) E115797
4	WIRE	POLYURETHANE UEW 0.6Φ	TAIHAN ELECTRIC WIRE CO., LTD. CNI CABLE CO.,LTD.	E109312(N) E210918
5	FLUX	HDF 102	HANDOK FLUX	
6	SOLDER	SN99.5%,CU0.5%	DONGBU HANNONG CHEMICAL CO.,LTD.	



NAMSUN ELECTRONICS CO., LTD.

Na-3506, Chungang Circulation Complex, 1258
Kurobon-dong, Kuro-Ku, Seoul, Korea, 152-721
TEL: 02-2689-9418 , FAX: 02-2689-8628

DESIGN

개발실
이상순
13-7-15

FILE NO.

CHECK

개발실
김상문
13-7-15

APPROVAL

개발실
노성복
13-7-15

SH - 080813 - 36

—

—

—

—