

승 인	
정식승인	()
한도승인	()

SPECIFICATIONS

CUSTOMER	
ITEM	RADIAL INDUCTOR
MODEL NAME	
PART No	DR4A-6.8mH(BULK)
DATE	2011-05-21

검 토	심 사	승 인
승인유효기간	승인일로부터	년

신청회사명	 NAMSIN ELECTRONICS CO.,LTD.	TEL	02-2689-9418
		FAX	02-2689-8628
주 소	Na-3506, Chungang Circulation Complex, 1258 Kurobon-dong, Kuro-Ku, Seoul, Korea, 152-721		

CUSTOMER : _____

SPECIFICATION		SHEET NO.	1 OF 8
		DATA	2011. 05.21.
PART NAME	RADIAL INDUCTOR	MODEL NAME	
PART NO.	DR4A-6.8mH(682 or 682K)	DESCRIPTION	DR 8 x 11mm

1. GENERAL SPECIFICATION

1) SCOPE

This specification applies to part number 6.8mH **RADIAL INDUCTOR(or PEAKING COIL)** for use in electronic appliances which is supplied for

2. MECHANICAL CHARACTERISTIC

PEAKING COIL shall conform in size, dimension, and other mechanical properties, to the part drawing attached here to.

1) Marking

PEAKING COIL shall be permanently and legibly marked with the part number on the specification position.

2) Terminal strength

Terminal shall withstand for 30 seconds without breakdown on losing when a static load of 2 Kg is applied in the drawing direction to the terminal at the point where the external load.

3. ENVIRONMENTAL & LIFE CHARACTERISTIC

1) Temperature rise

Temperature rise of the each winding and core shall be less than ambient + 65°C , when the **PEAKING COIL** continuously operated at full load(test load) until constant temperature is attained.

2) Heat-resistance

Immediately after **PEAKING COIL** being placed in room for 96 Hours maintained AT 105°C ± 2°C ambient temperature, the **PEAKING COIL** shall conform with the above part paragraph (4) and also insulation resistance shall be more than 100 MΩ.

3) Moisture resistance

Immediately after **PEAKING COIL** being placed in room for 120 Hours in such humidity chamber this is maintained at 90 - 95% relative humidity and 55°C ± 2°C temperature and wiped a drop of water, **PEAKING COIL** shall conform with the above paragraph(4) and also insulation shall be the 10 MΩ.

4) Safety consideration

PEAKING COIL shall meet all the requirements subject to IEC-950 standards for safety of information technology equipment including electrical business equipment.

5) Solderability

Dip pads in RMA flux, 96.5/0.5/3 solder (Sn/Cu/Ag)at 260°C for 5±2 seconds

NO	REVISION	DATE	CHECK	DRAWN	CHECKED	APPROVED
1						
2						
3						
4						




CUSTOMER : _____

SPECIFICATION		SHEET NO.	2 OF 8
		DATA	2011. 05.21.
PART NAME	RADIAL INDUCTOR	MODEL NAME	
PART NO.	DR4A-6.8mH(682 or 682K)	DESCRIPTION	DR 8 X 11mm

4. APPEARANCE & DIMENSION (UNIT:m/m)
 <Bulk type>

MARKING : 682 or 682K

EPOXY COLOR
GREEN
BROWN
RED

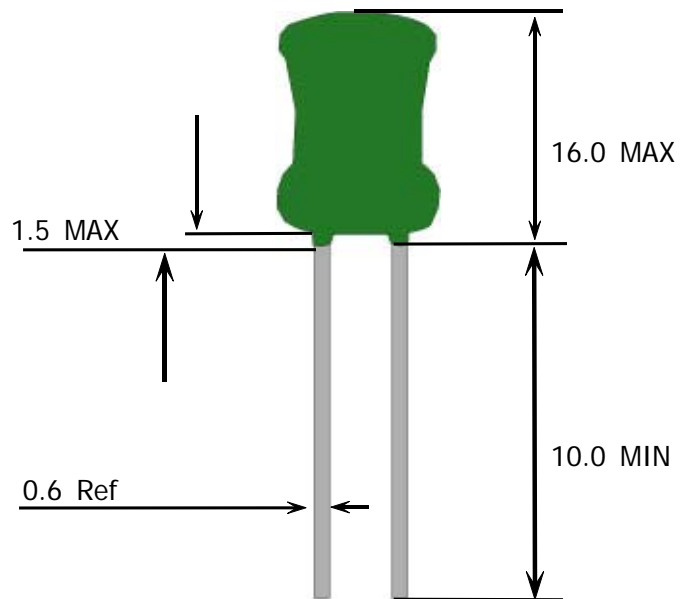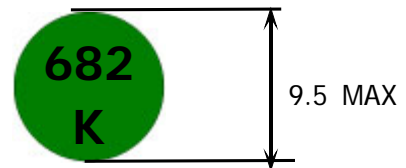

NO	REVISION	DATE	CHECK	DRAWN	CHECKED	APPROVED
1						
2						
3						
4						

CUSTOMER : _____

SPECIFICATION		SHEET NO.	3 OF 8
		DATA	2011. 05.21.
PART NAME	RADIAL INDUCTOR	MODEL NAME	
PART NO.	DR4A-6.8mH(682 or 682K)	DESCRIPTION	DR 8 X 11mm

5. WINDING SPEC

START & FINISH	TYPE OF WIRE	T U R N S	WINDING METHODE
	2UEW Φ 0.16	458.5_Ts REF	SOLENOID WINDING [C . C . W]

6. ELECTRICAL CHARACTERISTIC



NO	I T E M	MESURE	SPECIFICATION	REMARKS
1	INDUCTANCE	START & FINISH	<u>6.8</u> [mH] \pm 10%	HIOKI3522 LCR METER at 1kHz 1V
2	DC RESISTANCE	START & FINISH	<u>8.5</u> [Ω] MAX	WHEATSTONE BRIDGE TYPE 2755
3	DIELECTRIC WITHSTANDING TEST	COIL & CORE	AC <u>1</u> [KV] , FREQUANCY <u>60</u> [Hz] , <u>1</u> MINUTES, CUT OFF CURENT <u>2</u> [mA]	NO BREAKDOWN HPT-5010
4	INSULATION RESISTANCE	COIL & CORE	DC <u>500</u> [V] , <u>100</u> [M Ω] MIN	DM-500AD

NO	REVISION	DATE	CHECK	DRAWN	CHECKED	APPROVED
1						
2						
3						
4						

CUSTOMER : _____

SPECIFICATION		SHEET NO.	4 OF 8
		DATA	2011. 05.21.
PART NAME	RADIAL INDUCTOR	MODEL NAME	
PART NO.	DR4A-6.8mH(682 or 682K)	DESCRIPTION	DR 8 X 11mm

7. SCHEMATIC DIAGRAM

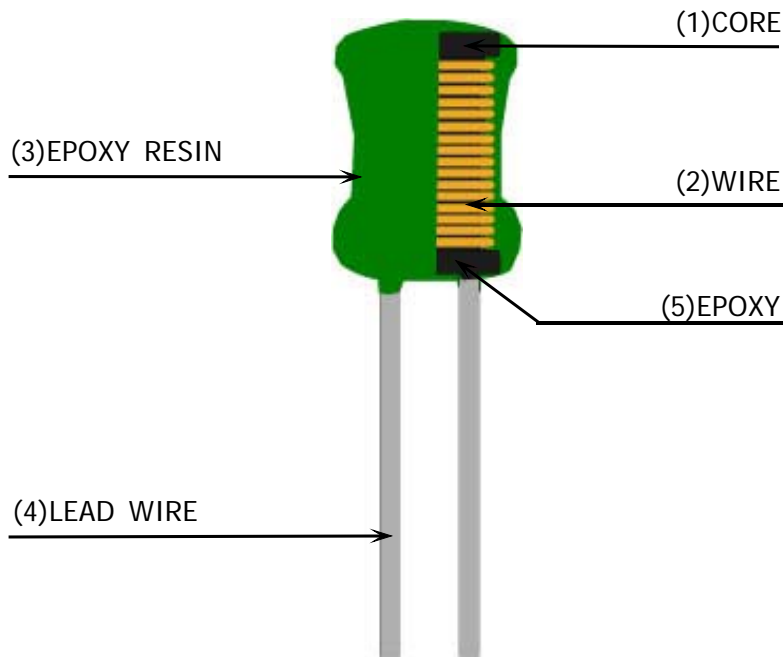

NO	REVISION	DATE	CHECK	DRAWN	CHECKED	APPROVED
1						
2						
3						
4						

CUSTOMER : _____

SPECIFICATION		SHEET NO.	5 OF 8
		DATA	2011. 05.21.
PART NAME	RADIAL INDUCTOR	MODEL NAME	
PART NO.	DR4A-6.8mH(682 or 682K)	DESCRIPTION	DR 8 X 11mm

8. MATERIAL LIST

NO	ITEM	MATERIAL & DIMENSION	MANUFACTURE	REMARK
1	CORE	JA3 DR 8 X 11mm	JIACI(ZHUHAI)ELECTRONICS CO.,LTD.	EQV
2	WIRE	2UEW Φ0.16	DONG YANG ELECTRONICS CO., LTD. CHUNHUI ELECTRICAL APPLANCES CO.,LTD.	E102761S E198440
3	EPOXY	EPI-CHEM 930	SAM SIN CHEMICAL CO.,LTD.	EQV
4	LEAD WIRE	TPCS 0.6Φ COPPER-WIRE	SAMATRON CO.,LTD MYOUNGTONG ELECTRONICS CO.,LTD.	EQV
5	EPOXY	FK661	QIFU ELECTRONICS MATERIALS FACTORY	EQV
-	SOLDER BAR	HSE-09 SN 100	HEESUNG MATERIAL LTD. JIAMENG CO.,LTD.	EQV
-	FLUX	F181	ZHUHAI FRIEND INDUSTRIAL CO.,LTD.	EQV
-	INK	270BK	DOMINO KOREA CO.,LTD.	EQV

9. TABLE OF STANDARD CHARACTERISTICS OF MATERIALS

PROPERTY UNIT MATERIAL	μiac ±25%	Bms GAUSS	Br GAUSS	WORKING Frequency(MHZ)	Tc ℃
JA3	300	2400	1300	0.1~2.0	150

NO	REVISION	DATE	CHECK	DRAWN	CHECKED	APPROVED
1						
2						
3						
4						

CUSTOMER : _____

SPECIFICATION		SHEET NO.	6 OF 8
		DATA	2011. 05.21.
PART NAME	RADIAL INDUCTOR	MODEL NAME	
PART NO.	DR4A-6.8mH(682 or 682K)	DESCRIPTION	DR 8 X 11mm

10. REMARK-1 / DONG YANG [UL CARD]

Magnet Wire - Component

See General Information for Magnet Wire - Component

DONG YANG ELECTRONICS IND CO LTD

E102761

5-20 BANGYE-RI

MUNMAK-EUB

WONJU-SHI, KANGWON-DO 220-800 REPUBLIC OF KOREA

Mtl Dsg	Coat Typ		ANSI Type	TI
	BC	OC		
AI-EIW	Polyester-	Polyamide-	MW35	200
	imide	imide		
DSB-EIA	Ester-imide	Polyamide	MW76	180
DSB-EIA(S)	Solderable	Polyamide	MW78	180
	ester-imide			
EIW	Polyester-		MW30	180
	imide			
NY-EIW	Polyester-	Polyamide	MW76	180
	amide-imide			
NY-PEW	Polyester	Polyamide	MW24	155
NY-PEW(F)	Polyester	Polyamide	MW24	155
NY-UEW	Polyurethane	Polyamide	MW80,	155,
			MW28#	130
UEW(F)	Polyurethane	—	MW79,	155,

NO	REVISION	DATE	CHECK	DRAWN	CHECKED	APPROVED
1						
2						
3						
4						

CUSTOMER : _____

SPECIFICATION		SHEET NO.	7 OF 8
		DATA	2011. 05.21.
PART NAME	RADIAL INDUCTOR	MODEL NAME	
PART NO.	DR4A-6.8mH(682 or 682K)	DESCRIPTION	DR 8 X 11mm

10. REMARK-2 / CHUN HUI [UL CARD]

Magnet Wire - Component

See General Information for Magnet Wire - Component

GUANGZHOU CHUNHUI ELECTRICAL APPLIANCES CO LTD E198440
 BLK 7, 8TH FL, ROOM H
 JIANADA GARDEN
 ZHONGSHAN DA DAO
 GUANGZHOU, GUANGDONG 510665 CHINA

Mtl Dsg	Mark Dsg	Coat Type		ANSI Type	Temp Class
		BC	OC		
XUEW-UL@	(1)	Polyurethane	?/TD>	MW75	130

(1)-Marked designations are the same as the material designations.

NO	REVISION	DATE	CHECK	DRAWN	CHECKED	APPROVED
1						
2						
3						
4						

CUSTOMER : _____

SPECIFICATION		SHEET NO.	8 OF 8
		DATA	2011. 05.21.
PART NAME	RADIAL INDUCTOR	MODEL NAME	
PART NO.	DR4A-6.8mH(682 or 682K)	DESCRIPTION	DR 8 X 11mm

11. INSPECTION DATA

NO	INDUCTANCE	DC RESISTANCE	내전압	절연저항
SPEC	6.8mH±10%	8.5Ω MAX	AC 1KV 1분 MIN	DC 500V 100MΩMIN
1	6.86	6.1	OK	OK
2	6.83	6.1	OK	OK
3	6.82	6	OK	OK
4	6.83	6.1	OK	OK
5	6.81	6.1	OK	OK
6	6.8	6.1	OK	OK
7	6.83	6.1	OK	OK
8	6.86	6	OK	OK
9	6.86	6	OK	OK
10	6.83	6.1	OK	OK
\bar{X}	6.833	6.07		
MIN	6.8	6		
MAX	6.86	6.1		

NO	REVISION	DATE	CHECK	DRAWN	CHECKED	APPROVED
1						
2						
3						
4						